

August 13, 2008

Mr. Curt Ence  
Filtakleen International  
220 West Cottage  
Sandy, UT 84070

SUBJECT: Letter Report for Southwest Research Institute® Project No. 08.13507.18.001,  
"ISO 23556 Soot Removal Test Results"

Dear Mr. Ence:

The soot removal efficiency as performed per ISO/TS 23556 for the Filtakleen filtration system was 21.3%. The efficiency as a function of time is shown in Figure 1.


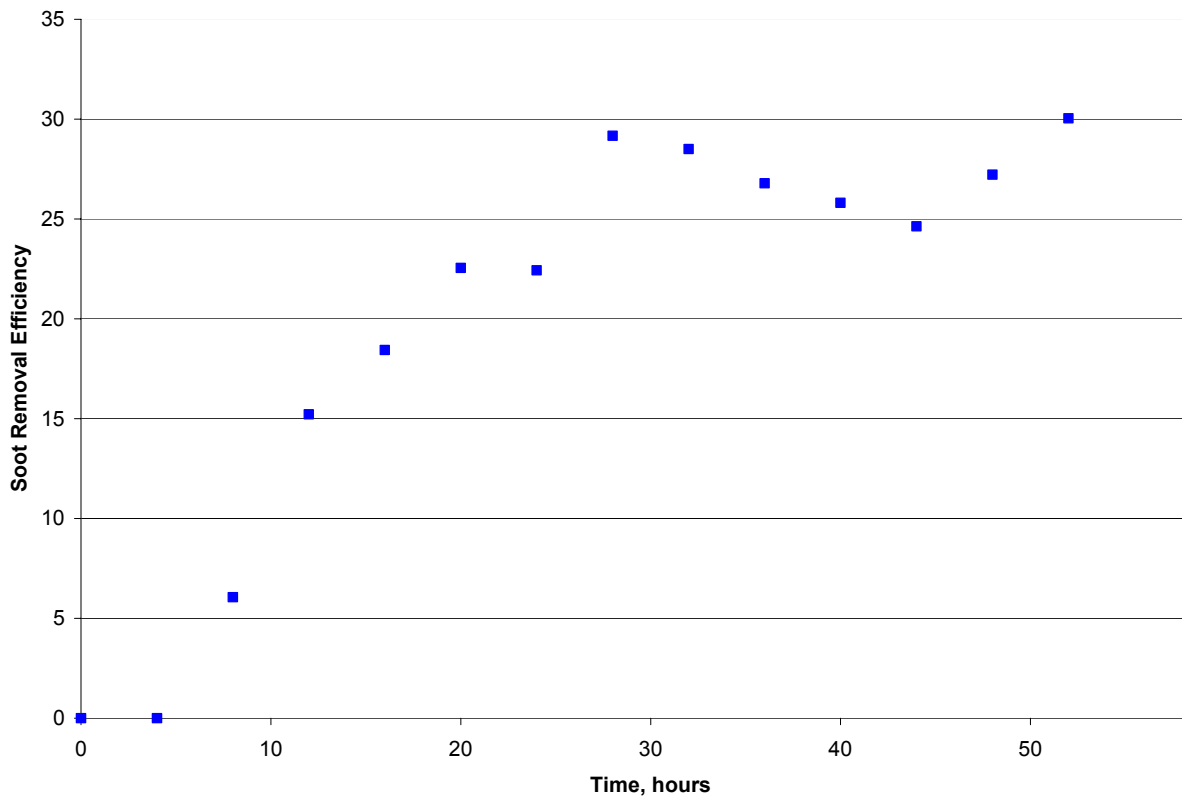


Figure 1. Soot Removal Efficiency as a Function of Time, %



If you have any questions, please contact me at (210) 522-6941 or [gbessee@swri.org](mailto:gbessee@swri.org).

Sincerely,



Gary B. Bessee, Manager  
Fluids Filtration & Handling Research

Approved by:



Steven D. Marty, P.E., Director  
Fuels & Lubricants Technology Department

GBB/rae  
r:\working\13507.18\ltr rpt\_13aug2008 soot.doc  
cc (via e-mail): S. Marty (SwRI)

*This report must be reproduced in full, unless SwRI approves a summary or abridgement.*